



The LINE OPAL is suitable across both residential and commercial projects. If the four different lengths are not enough, you can connect them together and create your own.

FEATURES

- + Recessed design providing simplicity and functionality
- + Quick and easy connection system
- + Easy installation into ceiling with spring clips attached to fitting
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



GENERAL SPECIFICATIONS

LED	15W 30W 45W 60W
Lumens	1200 lm 2300 lm 3900 lm 4600 lm
Colour	3000K, Warm White 4000K, Cool White
Efficacy	80 lm/w (3000K)
Beam	90°
Material	Aluminium
CRI	90+
Finish	White Black
IP	40
Colour Deviation	SDCM ≤3
Lifetime	L70 >60,000hrs
Warranty	5 Years

ACCESSORIES

Aluminium Joiners 7-LI41CONNECT


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

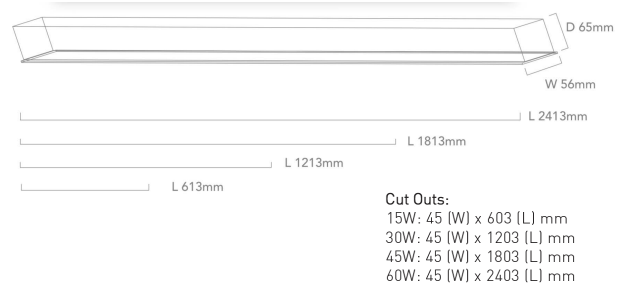

DRIVER SPECIFICATIONS

L 105 x W 43 x H 24 mm

Power	240V Remote Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

PRODUCT CODES

613mm, 15W, White, 3000K	7-LR560615W903
613mm, 15W, White, 4000K	7-LR560615W904
613mm, 15W, Black, 3000K	7-LR560615B903
613mm, 15W, Black, 4000K	7-LR560615B904
1213mm, 30W, White, 3000K	7-LR561230W903
1213mm, 30W, White, 4000K	7-LR561230W904
1213mm, 30W, Black, 3000K	7-LR561230B903
1213mm, 30W, Black, 4000K	7-LR561230B904
1813mm, 45W, White, 3000K	7-LR561845W903
1813mm, 45W, White, 4000K	7-LR561845W904
1813mm, 45W, Black, 3000K	7-LR561845B903
1813mm, 45W, Black, 4000K	7-LR561845B904
2413mm, 60W, White, 3000K	7-LR562460W903
2413mm, 60W, White, 4000K	7-LR562460W904
2413mm, 60W, Black, 3000K	7-LR562460B903
2413mm, 60W, Black, 4000K	7-LR562460B904