



# LINE OPAL



The LINE OPAL is as practical as it is stylish, it can be surface mounted or suspended; providing flexibility across both residential and commercial projects. If the four different lengths are not enough, you can connect them together and create your own.

## FEATURES

- + Surface mounted or suspended options
- + Specially designed ceiling canopy for fast installation and seamless design
- + Quick and easy connection system



## GENERAL SPECIFICATIONS

<b>LED</b>	15W   30W   45W   60W
<b>Lumens</b>	1200 lm   2400 lm   3600 lm   4800 lm (3000K)
<b>Colour</b>	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
<b>Efficacy</b>	Up to 88 lm/w (3000K)
<b>Beam</b>	90°
<b>Material</b>	Aluminium
<b>CRI</b>	90+
<b>Finish</b>	White   Black
<b>IP</b>	40
<b>Colour Deviation</b>	SDCM ≥3
<b>Warranty</b>	5 Years
<b>UGR</b>	> 22

## ACCESSORIES

**Aluminium Joiners** 7-LI41CONNECT


## PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

## DIMENSIONS (mm)

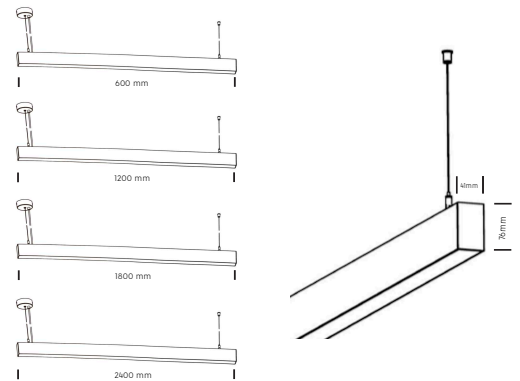

## DRIVER SPECIFICATIONS

<b>Power</b>	240V Built-In Flicker Free Driver
<b>Dimming</b>	Phase Cut Dimming
<b>Power Factor</b>	> 0.90

## PRODUCT CODE

600mm, 15W, White, 3000K	7-LI410615W903
600mm, 15W, White, 4000K	7-LI410615W904
600mm, 15W, Black, 3000K	7-LI410615B903
600mm, 15W, Black, 4000K	7-LI410615B904
1200mm, 30W, White, 3000K	7-LI411230W903
1200mm, 30W, White, 4000K	7-LI411230W904
1200mm, 30W, Black, 3000K	7-LI411230B903
1200mm, 30W, Black, 4000K	7-LI411230B904
1800mm, 45W, White, 3000K	7-LI411845W903
1800mm, 45W, White, 4000K	7-LI411845W904
1800mm, 45W, Black, 3000K	7-LI411845B903
1800mm, 45W, Black, 4000K	7-LI411845B904
2400mm, 60W, White, 3000K	7-LI412460W903
2400mm, 60W, White, 4000K	7-LI412460W904
2400mm, 60W, Black, 3000K	7-LI412460B903
2400mm, 60W, Black, 4000K	7-LI412460B904

