



The high-performance Faze LITE MINI features the latest in LED technology with high lumen per watt efficacy and visually dynamic illumination.

FEATURES

- + Precision reflector with clear lens - for better light distribution and performance
- + Specially designed heat sink - for class leading heat dissipation
- + IP 44 - Suitable for wet areas
- + IC-4 rated
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 11W (71-CAS300)



GENERAL SPECIFICATIONS

LED	10W
Lumens	870 lm (3000K) 1000 lm (4000K)
Colour	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Efficacy	87 lm/w (3000K) 100 lm/w (4000K)
Beam	36° 60°
Material	Powder Coated Aluminium
CRI	92+
Finish	White Black
IP	44
Colour Deviation	SDCM ≤2
Lifetime	L70 >310,000hrs
Warranty	5 Years

Please Note: When using C-Bus, use universal or trailing edge dimming modules


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

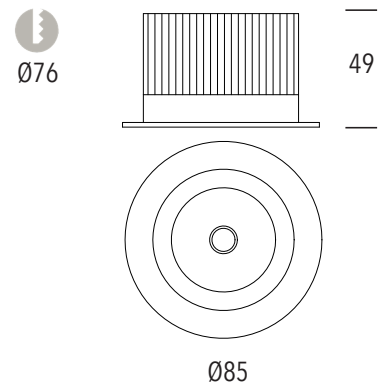

DRIVER SPECIFICATIONS

L 104 x W 43 x H 24 mm

Power	240V Remote Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

DALI dimming available upon request

PRODUCT CODES

White, 3000K, 60°	118-LI2M10W603
White, 4000K, 60°	118-LI2M10W604
Black, 3000K, 60°	118-LI2M10B603
Black, 4000K, 60°	118-LI2M10B604

REFLECTOR CODE

36° Reflector	118-RFLM36
---------------	-------------------

