

# LITE MINI



The high-performance Faze LITE MINI features the latest in LED technology with high lumen per watt efficacy and visually dynamic illumination.

## FEATURES

- + Precision reflector with clear lens - for better light distribution
- + Specially designed heat sink - for class leading heat dissipation
- + IP 44 - Suitable for wet areas
- + IC-4 rated
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 11W (71-CAS300)



## PROJECT DETAILS


PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTES: \_\_\_\_\_

## DIMENSIONS (mm)

**Cut Out**  
Ø76mm

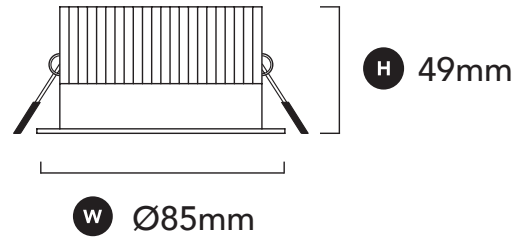

## DRIVER SPECIFICATIONS

**L 104 x W 43 x H 24 mm**

**Power** 250mA 240V Remote Dimmable Driver

**Dimming** Phase Cut Dimming

**Power Factor** > 0.90

***DALI dimming available upon request***

## PRODUCT CODES

White, 3000K, 60° **118-LI2M10W603**

White, 4000K, 60° **118-LI2M10W604**

Black, 3000K, 60° **118-LI2M10B603**

Black, 4000K, 60° **118-LI2M10B604**

## REFLECTOR CODE

36° Reflector **118-RFLLM36**

## GENERAL SPECIFICATIONS

<b>LED</b>	10W
<b>Lumens</b>	960 lm (3000K)   1040 lm (4000K)
<b>Efficacy</b>	86 lm/w (3000K)   96 lm/w (4000K)
<b>Colour Temperature</b>	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
<b>Material</b>	Powder Coated Aluminium
<b>Finish</b>	White   Black
<b>Beam</b>	36°   60°
<b>CRI</b>	92+
<b>IP</b>	44
<b>Colour Deviation</b>	SDCM ≤2
<b>UGR</b>	<19
<b>Lifetime</b>	>55,000hrs L80 B10
<b>Warranty</b>	5 Years

*Please Note: When using C-Bus, use universal or trailing edge dimming modules*