

PROJECT:


TYPE:

NOTES:


Architectonic and balanced, the LUXE CIRCLE combines advanced LED technologies, with high quality materials and refined, contemporary aesthetic.

FEATURES

- + Superior quality polycarbonate housing
- + UV resistant
- + Switchable between wattages
- + Available with a white trim
- + Integrated, flicker free, dimmable driver
- + IP 54 (Ø 220 & Ø 270) - suitable for wet areas

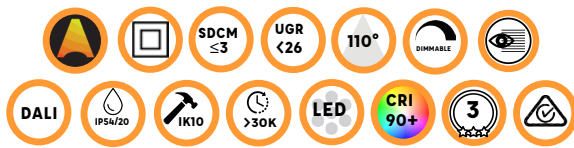

DIMENSIONS (mm)

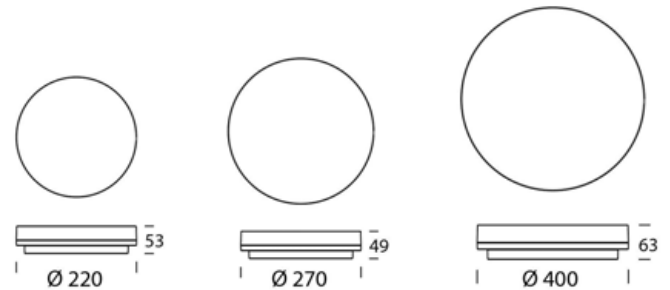

GENERAL SPECIFICATIONS

LED	15W/10W 24W/18W 38W/29W
Lumens	1570/1070 lm 2455/1885 lm 3860/3020 lm (3000K) 1620/1170 lm 2640/2010 lm 4090/3215 lm (4000K)
Efficacy	111/113 lm/w 107/109 lm/w 106/108 lm/w (3000K) 120/121 lm/w 113/114 lm/w 113/116 lm/w (4000K)
Colour Temp	☐ 3000K, Warm White ☐ 4000K, Cool White
Material	Polycarbonate
Finish	White
Beam	110°
CRI	90+
IP	54 (Ø 220 & Ø 270) 20 (Ø 400)
IK	10
Colour Deviation	SDCM ≤3
UGR	<26
Lifetime	>30,000hrs L70 B10
Warranty	3 Years

DRIVER SPECIFICATIONS

Power	240V Built-In Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95
<i>DALI dimming available upon request</i>	

PRODUCT CODES

15W, White, 3000K	83-LXC2215W3
15W, White, 4000K	83-LXC2215W4
24W, White, 3000K	83-LXC2724W3
24W, White, 4000K	83-LXC2724W4
38W, White, 3000K	83-LXC4038W3
38W, White, 4000K	83-LXC4038W4