

PROJECT DETAILS

PROJECT:

TYPE:


NOTES:

FEATURES

- + Minimalist cylinder design, available in various colours and lengths
- + Sophisticated lens technology for enhanced visual comfort
- + Black baffle for reduced glare
- + Seamless canopy with quick connection for easy installation
- + Perfect for both individual use or as a cluster
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



DIMENSIONS (mm)

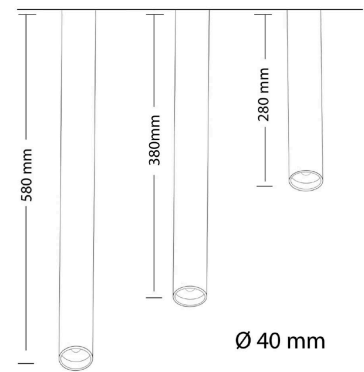

GENERAL SPECIFICATIONS

LED	6W	
Lumens	400 lm (3000K)	
Colour	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White	
Efficacy	66.79 lm/w (3000K)	
Beam	60°	
Material	Powder Coat Aluminium	
CRI	92+	
Finish	White Black	
IP	20	
Colour Deviation	SDCM ≤2	
Lifetime	L70 >100,000hrs	
Additional Lens Options	15°	118-SIL4015
	24°	118-SIL4024
	36°	118-SIL4036
	45°	118-SIL4045
Warranty	5 Years	

DRIVER SPECIFICATIONS

Power 240V Built-In Flicker Free Driver

Dimming Phase-Cut Dimming

Power Factor >0.90

Remote DALI dimming available upon request

PRODUCT CODE

280, White, 3000K **118-SIS42806W603**

280, White, 4000K **118-SIS42806W604**

280, Black, 3000K **118-SIS42806B603**

280, Black, 4000K **118-SIS42806B604**

380, White, 3000K **118-SIS43806W603**

380, White, 4000K **118-SIS43806W604**

380, Black, 3000K **118-SIS43806B603**

380, Black, 4000K **118-SIS43806B604**

580, White, 3000K **118-SIS45806W603**

580, White, 4000K **118-SIS45806W604**

580, Black, 3000K **118-SIS45806B603**

580, Black, 4000K **118-SIS45806B604**