

PROJECT:

TYPE:

NOTES:



FEATURES


- + Minimalist cylinder design, available in various colours and lengths
- + Sophisticated lens technology for enhanced visual comfort
- + Black baffle for reduced glare
- + Seamless canopy with quick connection for easy installation
- + Perfect for both individual use or as a cluster



GENERAL SPECIFICATIONS

| | | |
|--------------------------------|--|--------------------|
| LED | 6W | |
| Lumens | 400 lm (3000K) | |
| Colour | <input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White | |
| Efficacy | 66.79 lm/w (3000K) | |
| Beam | 60° | |
| Material | Powder Coat Aluminium | |
| CRI | 92+ | |
| Finish | White Black | |
| IP | 20 | |
| Colour Deviation | SDCM ≤2 | |
| Lifetime | L70 >100,000hrs | |
| Accessories | Gold Baffle | 118-SIL40GB |
| Additional Lens Options | 15° | 118-SIL4015 |
| | 24° | 118-SIL4024 |
| | 36° | 118-SIL4036 |
| | 45° | 118-SIL4045 |
| Warranty | 5 Years | |
| Cable Length | 2 Metres | |

DIMENSIONS (mm)

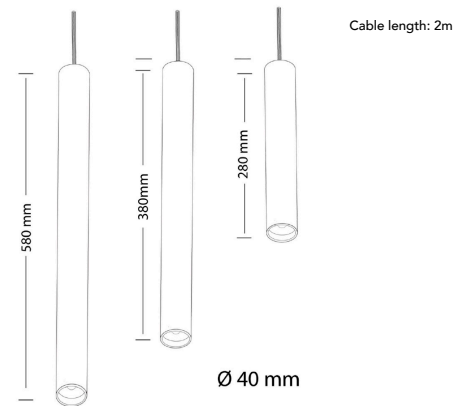

DRIVER SPECIFICATIONS

| | |
|---------------------|-----------------------------------|
| Power | 240V Built-In Flicker Free Driver |
| Dimming | Phase-Cut Dimming |
| Power Factor | >0.90 |

PRODUCT CODE

| | |
|-------------------|-------------------------|
| 280, White, 3000K | 118-SIP42806W603 |
| 280, White, 4000K | 118-SIP42806W604 |
| 280, Black, 3000K | 118-SIP42806B603 |
| 280, Black, 4000K | 118-SIP42806B604 |
| 380, White, 3000K | 118-SIP43806W603 |
| 380, White, 4000K | 118-SIP43806W604 |
| 380, Black, 3000K | 118-SIP43806B603 |
| 380, Black, 4000K | 118-SIP43806B604 |
| 580, White, 3000K | 118-SIP45806W603 |
| 580, White, 4000K | 118-SIP45806W604 |
| 580, Black, 3000K | 118-SIP45806B603 |
| 580, Black, 4000K | 118-SIP45806B604 |