



SILO 60 SURFACE MOUNTED



FEATURES

- + Minimalist cylinder design, available in various colours and lengths
- + Sophisticated lens technology for enhanced visual comfort
- + Black baffle for reduced glare
- + Seamless canopy with quick connection for easy installation
- + Perfect for both individual use or as a cluster
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



GENERAL SPECIFICATIONS

LED	12W	
Lumens	1100 lm (3000K)	
Colour	3000K, Warm White 4000K, Cool White	
Efficacy	87 lm/w (3000K)	
Beam	60°	
Material	Powder Coat Aluminium	
CRI	92+	
Finish	White Black	
IP	20	
Colour Deviation	SDCM ≤2	
Lifetime	L70 >100,000hrs	
Accessories	Gold Baffle	118-SIL60GB
Additional Lens Options	15°	118-SIL6015
	24°	118-SIL6024
	36°	118-SIL6036
	45°	118-SIL6045
Warranty	5 Years	


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

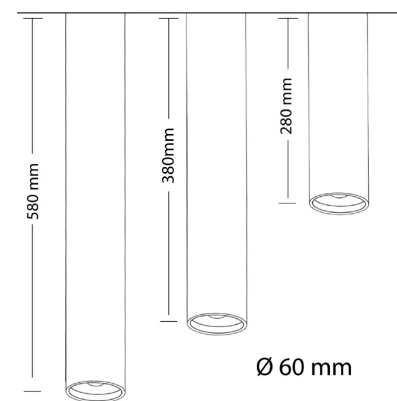

DRIVER SPECIFICATIONS

Power 240V Built-In Flicker Free Driver

Dimming Phase-Cut Dimming

Power Factor >0.90

PRODUCT CODE

280, White, 3000K **118-SIS62812W603**

280, White, 4000K **118-SIS62812W604**

280, Black, 3000K **118-SIS62812B603**

280, Black, 4000K **118-SIS62812B604**

380, White, 3000K **118-SIS63812W603**

380, White, 4000K **118-SIS63812W604**

380, Black, 3000K **118-SIS63812B603**

380, Black, 4000K **118-SIS63812B604**

580, White, 3000K **118-SIS65812W603**

580, White, 4000K **118-SIS65812W604**

580, Black, 3000K **118-SIS65812B603**

580, Black, 4000K **118-SIS65812B604**