




SILO 60 SURFACE MOUNTED

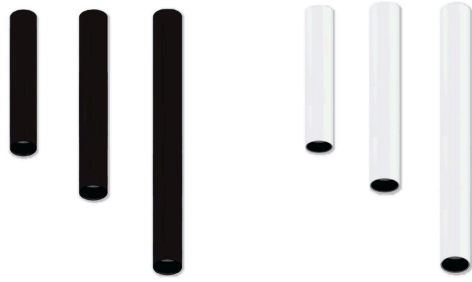

PROJECT DETAILS

PROJECT: _____

TYPE: _____


NOTES: _____

FEATURES

- + Minimalist cylinder design, available in various colours and lengths
- + Sophisticated lens technology for enhanced visual comfort
- + Black baffle for reduced glare
- + Seamless canopy with quick connection for easy installation
- + Perfect for both individual use or as a cluster
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



DIMENSIONS (mm)

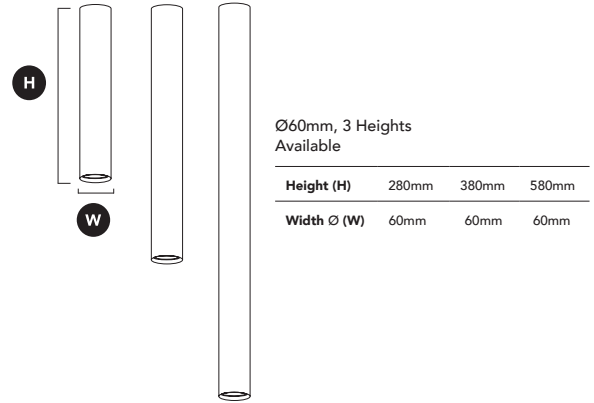

GENERAL SPECIFICATIONS

LED	12W
Lumens	1080 lm (3000K & 4000K)
Efficacy	84 lm/w (3000K & 4000K)
Colour Temp	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	15° 24° 36° 45° 60°
CRI	92+
IP	20
Colour Deviation	SDCM ≤2
UGR	<15
Lifetime	>55,000hrs L80 B10
Warranty	5 Years

Additional Lens Options	15° Lens	118-SIL6015
	25° Lens	118-SIL6024
	36° Lens	118-SIL6036
	45° Lens	118-SIL6045

Additional Baffle Options	Black Baffle	118-SIL60BB
	White Baffle	118-SIL60BG
	Gold Baffle	118-SIL60BG

DRIVER SPECIFICATIONS

Power	300mA 240V Built-In Flicker Free Dimmable Driver
Dimming	Phase-Cut Dimming
Power Factor	>0.90

Remote DALI dimming available upon request

PRODUCT CODES

280, White, 3000K, 60°	118-SIS62812W603
280, White, 4000K, 60°	118-SIS62812W604
280, Black, 3000K, 60°	118-SIS62812B603
280, Black, 4000K, 60°	118-SIS62812B604
380, White, 3000K, 60°	118-SIS63812W603
380, White, 4000K, 60°	118-SIS63812W604
380, Black, 3000K, 60°	118-SIS63812B603
380, Black, 4000K, 60°	118-SIS63812B604
580, White, 3000K, 60°	118-SIS65812W603
580, White, 4000K, 60°	118-SIS65812W604
580, Black, 3000K, 60°	118-SIS65812B603
580, Black, 4000K, 60°	118-SIS65812B604