



SILO 60 SUSPENSION



FEATURES

- + Minimalist cylinder design, available in various colours and lengths
- + Sophisticated lens technology for enhanced visual comfort
- + Seamless canopy with quick connection for easy installation
- + Perfect for both individual use or as a cluster
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



GENERAL SPECIFICATIONS

LED	12W	
Lumens	1080 lm (3000K & 4000K)	
Efficacy	84 lm/w (3000K & 4000K)	
Colour Temp	<input type="checkbox"/> 3000K, Warm White	<input type="checkbox"/> 4000K, Cool White
Material	Powder Coated Aluminium	
Finish	White Black	
Beam	15° 24° 36° 45° 60°	
CRI	92+	
IP	20	
Colour Deviation	SDCM ≤2	
UGR	<15	
Lifetime	>55,000hrs L80 B10	
Warranty	5 Years	
Additional Lens Options	15° Lens	118-SIL6015
	25° Lens	118-SIL6024
	36° Lens	118-SIL6036
	45° Lens	118-SIL6045
Additional Baffle Options	Black Baffle	118-SIL60BB
	White Baffle	118-SIL60BG
	Gold Baffle	118-SIL60BG


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

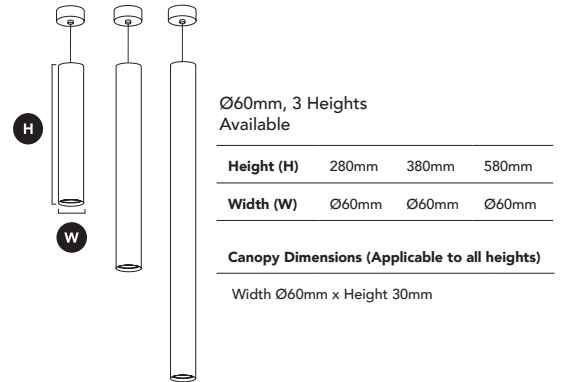

DRIVER SPECIFICATIONS

Power	300mA 240V Built-In Flicker Free Dimmable Driver
Dimming	Phase-Cut Dimming
Power Factor	>0.90

Remote DALI dimming available upon request

PRODUCT CODES

280, White, 3000K, 60°	118-SIP62812W603
280, White, 4000K, 60°	118-SIP62812W604
280, Black, 3000K, 60°	118-SIP62812B603
280, Black, 4000K, 60°	118-SIP62812B604
380, White, 3000K, 60°	118-SIP63812W603
380, White, 4000K, 60°	118-SIP63812W604
380, Black, 3000K, 60°	118-SIP63812B603
380, Black, 4000K, 60°	118-SIP63812B604
580, White, 3000K, 60°	118-SIP65812W603
580, White, 4000K, 60°	118-SIP65812W604
580, Black, 3000K, 60°	118-SIP65812B603
580, Black, 4000K, 60°	118-SIP65812B604