

PROJECT: _____

TYPE: _____

NOTES: _____




FEATURES

- + Specially designed heat sink - for class leading heat dissipation
- + IC-4 rated
- + IP44 and suitable for wet areas
- + High quality diffuser for increased lumen output
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



DIMENSIONS (mm)

Cut Out
Ø92mm

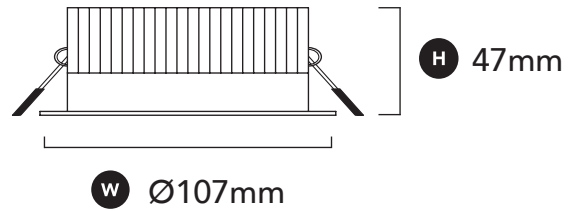

GENERAL SPECIFICATIONS

LED	12W
Lumens	1040 lm (3000K) 1070 lm (4000K)
Efficacy	87 lm/w (3000K) 88 lm/w (4000K)
Colour Temperature	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black Silver
Beam	90°
CRI	92+
IP	44
Colour Deviation	SDCM ≤3
UGR	<27
Lifetime	>55,000hrs L80 B10
Warranty	5 Years

DRIVER SPECIFICATIONS

L 104 x W 43 x H 24 mm	
Power	300mA 240V Remote Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95
<i>DALI dimming available upon request</i>	

PRODUCT CODES

White, 3000K	118-DS5L12W903
White, 4000K	118-DS5L12W904
Black, 3000K	118-DS5L12B903
Black, 4000K	118-DS5L12B904
Silver, 3000K	118-DS5L12S903
Silver, 4000K	118-DS5L12S904

Please Note: When using C-Bus, use universal or trailing edge dimming modules