



Perfectly balanced - the EDGE 100 downlight features a trimless, concave design and deep set lamp position, its very discreet. Utilising advanced LED engines to achieve unmatched illumination with a fraction of the energy.

## FEATURES

- + Adjustable head up to 25°
- + Precision reflector with clear lens - for better light distribution and performance.
- + Specially designed heat sink - for class leading heat dissipation.
- + Deep set lamp position - for visual comfort and glare control.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)



## GENERAL SPECIFICATIONS

|                         |                                                                                            |
|-------------------------|--------------------------------------------------------------------------------------------|
| <b>LED</b>              | 13W *operating wattage 14.8                                                                |
| <b>Lumens</b>           | 1170 lm (3000K)   1320 lm (4000K)                                                          |
| <b>Colour</b>           | <div> <div></div> 3000K, Warm White           <div></div> 4000K, Cool White         </div> |
| <b>Efficacy</b>         | 90 lm/w (3000K)   101 lm/w (4000K)                                                         |
| <b>Beam</b>             | 15°   36°   60°                                                                            |
| <b>Material</b>         | Powder Coat Aluminium                                                                      |
| <b>CRI</b>              | 92+                                                                                        |
| <b>Finish</b>           | White   Black                                                                              |
| <b>IP</b>               | 44                                                                                         |
| <b>Colour Deviation</b> | SDCM ≤2                                                                                    |
| <b>Lifetime</b>         | L70 >100,000                                                                               |
| <b>Warranty</b>         | 7 Years                                                                                    |

Please Note: When using C-Bus, use universal or trailing edge dimming modules


## PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

## DIMENSIONS (mm)

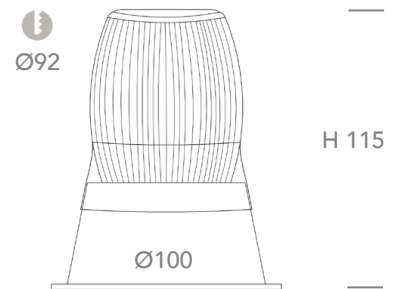

## DRIVER SPECIFICATIONS

L 104 x W 43 x H 24mm

|                     |                             |
|---------------------|-----------------------------|
| <b>Power</b>        | 240V Remote Dimmable Driver |
| <b>Dimming</b>      | Phase Cut Dimming           |
| <b>Power Factor</b> | > 0.90                      |

## PRODUCT CODE

|                   |                       |
|-------------------|-----------------------|
| White, 3000K, 15° | <b>118-ED2L13W153</b> |
| White, 3000K, 36° | <b>118-ED2L13W363</b> |
| White, 3000K, 60° | <b>118-ED2L13W603</b> |
| White, 4000K, 15° | <b>118-ED2L13W154</b> |
| White, 4000K, 36° | <b>118-ED2L13W364</b> |
| White, 4000K, 60° | <b>118-ED2L13W604</b> |
| Black, 3000K, 15° | <b>118-ED2L13B153</b> |
| Black, 3000K, 36° | <b>118-ED2L13B363</b> |
| Black, 3000K, 60° | <b>118-ED2L13B603</b> |
| Black, 4000K, 15° | <b>118-ED2L13B154</b> |
| Black, 4000K, 36° | <b>118-ED2L13B364</b> |
| Black, 4000K, 60° | <b>118-ED2L13B604</b> |

