



A clean finish every time - the EDGE 135 downlight is a larger version of the Edge 110, ideal for commercial projects. Utilising advanced LED engines, the Edge 135 achieves unmatched illumination with a fraction of the energy.

FEATURES

- + Adjustable head up to 25°
- + Ideal for commercial projects
- + Precision reflector with clear lens - for better light distribution and performance
- + Specially designed heat sink - for class leading heat dissipation
- + Deep set lamp position - for visual comfort and glare control
- + Suitable for concrete install with concrete canister (ordered separately)
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 71-CAS600



GENERAL SPECIFICATIONS

LED	25W
Lumens	2200 lm (3000K)
Colour	☐ 3000K, Warm White ☐ 4000K, Cool White
Efficacy	88 lm/w (3000K)
Beam	24° 36° 60°
Material	Powder Coat Aluminium
CRI	97+
Finish	White Black
IP	44
Colour Deviation	SDCM ≥2
Lifetime	100,000hrsL70
Warranty	7 Years

Please Note: When using C-Bus, use universal or trailing edge dimming modules


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

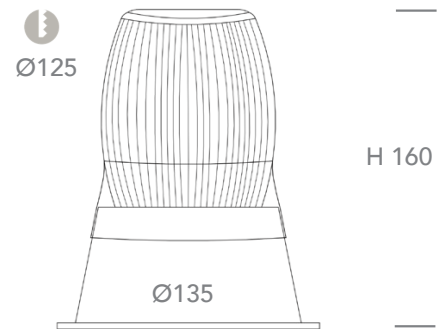

DRIVER SPECIFICATIONS

L 104 x W 43 x H 24mm

Power	240V Remote Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

PRODUCT CODE

White, 3000K, 24°	118-ED7C20W243
White, 3000K, 36°	118-ED7C20W363
White, 3000K, 60°	118-ED7C20W603
White, 4000K, 24°	118-ED7C20W244
White, 4000K, 36°	118-ED7C20W364
White, 4000K, 60°	118-ED7C20W604
Black, 3000K, 24°	118-ED7C20B243
Black, 3000K, 36°	118-ED7C20B363
Black, 3000K, 60°	118-ED7C20B603
Black, 4000K, 24°	118-ED7C20B244
Black, 4000K, 36°	118-ED7C20B364
Black, 4000K, 60°	118-ED7C20B604

