

# PRO ROUND



The new generation Faze PRO downlight is specifically designed to enhance. Utilizing superior LED technology and with the highest CRI, these recessed ceiling lights are guaranteed to bring your spaces to life.

## FEATURES

- + Precision reflector with clear lens - for better light distribution and performance.
- + Specially designed heat sink - for class leading heat dissipation.
- + IC-4 rated
- + Black baffle design - eliminates glare for optimum visual comfort.
- + IP44 and suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)



## GENERAL SPECIFICATIONS

<b>LED</b>	13W *operating wattage 14.8W
<b>Lumens</b>	970 lm (3000K)   1080 (4000K)
<b>Colour</b>	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
<b>Efficacy</b>	74 lm/w (3000K)   83 lm/w (4000K)
<b>Beam</b>	15°   24°   36°   60°
<b>Material</b>	Powder Coat Aluminium
<b>CRI</b>	97+
<b>Finish</b>	White   Black
<b>IP</b>	44
<b>Colour Deviation</b>	SDCM ≤2
<b>Lifetime</b>	L70 >310,000hrs
<b>Warranty</b>	7 Years

**Please Note:** When using C-Bus, use universal or trailing edge dimming modules


## PROJECT DETAILS

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTES: \_\_\_\_\_

## DIMENSIONS (mm)

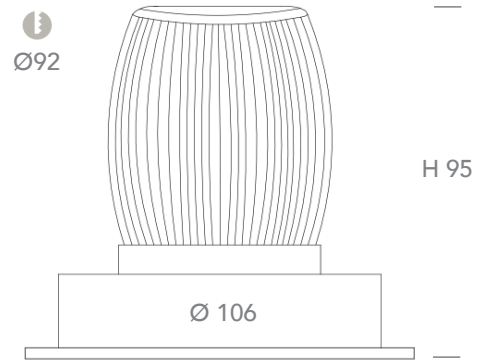

## DRIVER SPECIFICATIONS

<b>L 107 x W 43 x H 25 mm</b>	
<b>Power</b>	240V Remote Dimmable Driver
<b>Dimming</b>	Phase Cut Dimming
<b>Power Factor</b>	> 0.90

## PRODUCT CODES

White, 3000K, 60°	<b>118-PR7LR13W603</b>
White, 4000K, 60°	<b>118-PR7LR13W604</b>
Black, 3000K, 60°	<b>118-PR7LR13B603</b>
Black, 4000K, 60°	<b>118-PR7LR13B604</b>

## REFLECTOR CODES

15° Reflector	<b>118-RFLP15</b>
24° Reflector	<b>118-RFLP24</b>
36° Reflector	<b>118-RFLP36</b>