


PRO ROUND



The new generation Faze PRO downlight is specifically designed to enhance. Utilizing superior LED technology and with the highest CRI, these recessed ceiling lights are guaranteed to bring your spaces to life.

FEATURES

- + Precision reflector with clear lens - for better light distribution.
- + Specially designed heat sink - for class leading heat dissipation.
- + IC-4 rated
- + Black baffle design - eliminates glare for optimum visual comfort
- + Suitable for concrete install with concrete canister (ordered separately)
- + IP44 and suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)

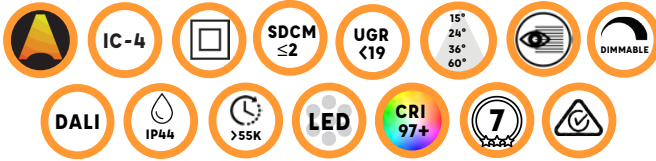

GENERAL SPECIFICATIONS

LED	13W *operating wattage 14.8W
Lumens	1015 lm (3000K) 1215 (4000K)
Efficacy	66 lm/w (3000K) 78 lm/w (4000K)
Colour Temperature	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	15° 24° 36° 60°
CRI	97+
IP	44
Colour Deviation	SDCM ≤2
UGR	<19
Lifetime	>55,000hrs L80 B10
Warranty	7 Years


PROJECT DETAILS

PROJECT: _____

TYPE: _____

NOTES: _____

DIMENSIONS (mm)

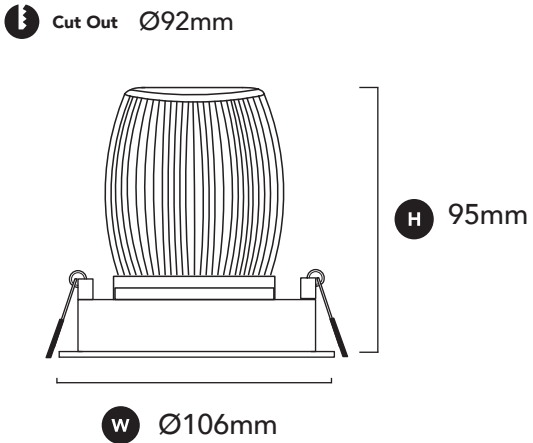

DRIVER SPECIFICATIONS

L 107 x W 43 x H 25 mm	
Power	350mA 240V Remote, Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

DALI dimming available upon request

PRODUCT CODES

White, 3000K, 60°	118-PR7LR13W603
White, 4000K, 60°	118-PR7LR13W604
Black, 3000K, 60°	118-PR7LR13B603
Black, 4000K, 60°	118-PR7LR13B604

REFLECTOR CODES

15° Reflector	118-RFLP15
24° Reflector	118-RFLP24
36° Reflector	118-RFLP36

Please Note: When using C-Bus, use universal or trailing edge dimming modules