



The new generation Faze PRO downlight is specifically designed to enhance. Utilizing superior LED technology and with the highest CRI, these recessed ceiling lights are guaranteed to bring your spaces to life.

FEATURES

- + Precision reflector with clear lens - for better light distribution and performance.
- + Specially designed heat sink - for class leading heat dissipation.
- + IC-4 rated
- + Black baffle design - eliminates glare for optimum visual comfort.
- + IP44 and suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)



GENERAL SPECIFICATIONS

LED	13W *operating wattage 14.8W
Lumens	970 lm (3000K) 1080 (4000K)
Colour	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Efficacy	74 lm/w (3000K) 83 lm/w (4000K)
Beam	15° 24° 36° 60°
Material	Powder Coated Aluminium
CRI	97+
Finish	White Black
IP	44
Colour Deviation	SDCM ≤2
UGR	<19
Lifetime	310,000hrs L70B10
Warranty	7 Years

Please Note: When using C-Bus, use universal or trailing edge dimming modules


PROJECT DETAILS

PROJECT: _____

TYPE: _____

NOTES: _____

DIMENSIONS (mm)

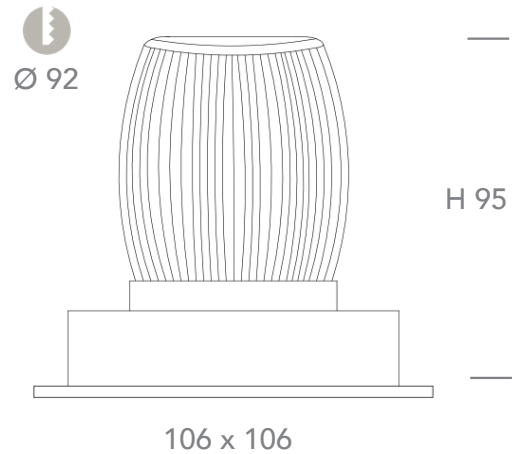

DRIVER SPECIFICATIONS

L 107 x W 43 x H 25 mm

Power	350mA 240V Remote, Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

DALI dimming available upon request

PRODUCT CODES

White, 3000K, 60°	118-PR7LS13W603
White, 4000K, 60°	118-PR7LS13W604
Black, 3000K, 60°	118-PR7LS13B603
Black, 4000K, 60°	118-PR7LS13B604

REFLECTOR CODES

15° Reflector	118-RFLP15
24° Reflector	118-RFLP24
36° Reflector	118-RFLP36