



PRO SQUARE



The new generation Faze PRO downlight is specifically designed to enhance. Utilizing superior LED technology and with the highest CRI, these recessed ceiling lights are guaranteed to bring your spaces to life.

FEATURES

- + Precision reflector with clear lens - for better light distribution and performance.
- + Specially designed heat sink - for class leading heat dissipation.
- + IC-4 rated
- + Black baffle design - eliminates glare for optimum visual comfort.
- + IP44 and suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)



GENERAL SPECIFICATIONS

LED	13W *operating wattage 14.8W
Lumens	970 lm (3000K) 1080 (4000K)
Colour	3000K, Warm White 4000K, Cool White
Efficacy	74 lm/w (3000K) 83 lm/w (4000K)
Beam	15° 24° 36° 60°
Material	Powder Coat Aluminium
CRI	97+
Finish	White Black
IP	44
Colour Deviation	SDCM ≤2
Lifetime	L70 >310,000hrs
Warranty	7 Years

Please Note: When using C-Bus, use universal or trailing edge dimming modules


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

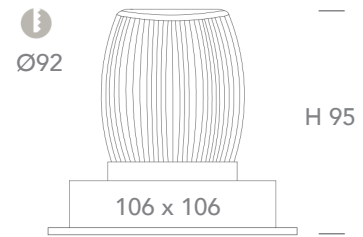

DRIVER SPECIFICATIONS

L 107 x W 43 x H 25 mm

Power	240V Remote Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

PRODUCT CODE

White, 3000K, 15°	118-PR7LS13W153
White, 3000K, 24°	118-PR7LS13W243
White, 3000K, 36°	118-PR7LS13W363
White, 3000K, 60°	118-PR7LS13W603
White, 4000K, 15°	118-PR7LS13W154
White, 4000K, 24°	118-PR7LS13W244
White, 4000K, 36°	118-PR7LS13W364
White, 4000K, 60°	118-PR7LS13W604
Black, 3000K, 15°	118-PR7LS13B153
Black, 3000K, 24°	118-PR7LS13B243
Black, 3000K, 36°	118-PR7LS13B363
Black, 3000K, 60°	118-PR7LS13B603
Black, 4000K, 15°	118-PR7LS13B154
Black, 4000K, 24°	118-PR7LS13B244
Black, 4000K, 36°	118-PR7LS13B364
Black, 4000K, 60°	118-PR7LS13B604

