




The new generation Faze PRO MINI downlight is specifically designed to enhance. Utilizing superior LED technology and with the highest CRI, these recessed ceiling lights are guaranteed to bring your spaces to life.

## FEATURES

- + Precision reflector with clear lens - for better light distribution
- + Specially designed heat sink - for class leading heat dissipation.
- + IC-4 rated
- + Black baffle design - eliminates glare for optimum visual comfort.
- + IP44 and suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 11W (71-CAS300)

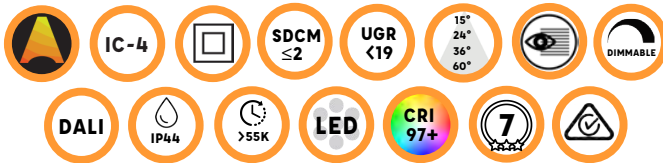

## GENERAL SPECIFICATIONS

<b>LED</b>	11W *operating wattage 12W
<b>Lumens</b>	880 lm (3000K)   960 lm (4000K)
<b>Efficacy</b>	65 lm/w (3000K)   72 lm/w (4000K)
<b>Colour Temperature</b>	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
<b>Material</b>	Powder Coated Aluminium
<b>Finish</b>	White   Black
<b>Beam</b>	15°   24°   36°   60°
<b>CRI</b>	97+
<b>IP</b>	44
<b>Colour Deviation</b>	SDCM ≤2
<b>UGR</b>	<19
<b>Lifetime</b>	>55,000hrs L80 B10
<b>Warranty</b>	7 Years

**Please Note:** When using C-Bus, use universal or trailing edge dimming modules

## PROJECT DETAILS


PROJECT:

TYPE:

NOTES:

## DIMENSIONS (mm)

Cut Out Ø76mm

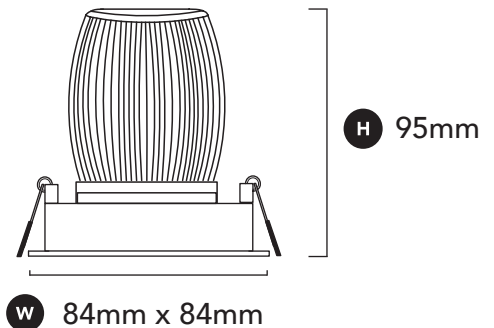

## DRIVER SPECIFICATIONS

**L 98 x W 38 x H 24 mm**

<b>Power</b>	300mA 240V Remote, Flicker Free Dimmable Driver
<b>Dimming</b>	Phase Cut Dimming
<b>Power Factor</b>	> 0.90

*DALI dimming available upon request*

## PRODUCT CODES

White, 3000K, 60°	<b>118-PR7MS11W603</b>
White, 4000K, 60°	<b>118-PR7MS11W604</b>
Black, 3000K, 60°	<b>118-PR7MS11B603</b>
Black, 4000K, 60°	<b>118-PR7MS11B604</b>

## REFLECTOR CODES

15° Reflector	<b>118-RFLP15</b>
24° Reflector	<b>118-RFLP24</b>
36° Reflector	<b>118-RFLP36</b>

