radiantlighting

MODUX 2 & 4 HANGING LIGHT

By LuxR **SUSPENSION / OUTDOOR**

The Modux Two & Four hanging lights are designed to be suspended from a ceiling or trees to provide downwards illumination or a dynamic moon lighting effect. Includes a stainless steel cable at 1m or 3m lengths.

PROJECT

TYPE	
NOTES	

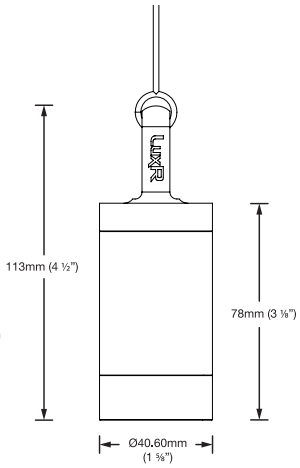

GENERAL SPECIFICATIONS

LED (Modux 2 | Modux 4)	2 W | 4 W
LUMENS	175 Lm | 375 Lm
EFFICACY	89 Lm / W | 94 Lm / W
COLOUR TEMPERATURE	2700K | 3000K | 4000K
MATERIAL	Solid Brass
FINISH	Solid Brass
BEAM	26°, 36°, 74°
CRI	90+
IP	68
WARRANTY	10 Years: Brass & Stainless Steel 5 Years: Electronics & Aluminium
ORIGIN	New Zealand

POWER SPECIFICATIONS

DRIVER SERIES WIRING	**700mA Constant Current (Remote)**
DRIVER PARALLEL WIRING	**12VAC (Integral)** Remote 12VAC Transformer Required **24VDC (Integral)** Remote 24VDC Driver Required

PRODUCT CODES (SERIES WIRING)

MODUX 2, BRASS, 3000K, 74°	128-M2HNGRB7430
MODUX 4, BRASS, 3000K, 74°	128-M4HNGRB7430

PARALLEL WIRING AVAILABLE UPON REQUEST

SERIES WIRING

INPUT 240VAC **OUTPUT** DC Constant Current

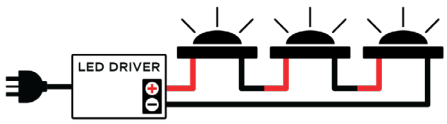

PARALLEL WIRING

INPUT 240VAC **OUTPUT** 12VAC | 24VDC

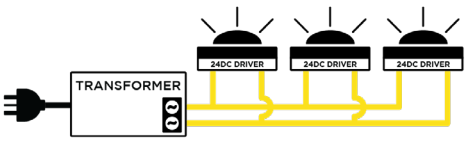

PERTH
+61 08 9240 1008
sales@radiantlighting.com.au

SYDNEY
1300 438 609
sales@radiantlighting.com.au

MELBOURNE
1300 438 609
sales@radiantlighting.com.au

BRISBANE
1300 438 609
sales@radiantlighting.com.au