radiantlighting

MODUX 4 SINGLE POLE LIGHT

By LuxR **OUTDOOR**

An adjustable head provides precise control over light direction, perfect for highlighting pathways, garden features, or individual landscape elements. Custom pole lengths avaliable.

PROJECT

TYPE	
NOTES	

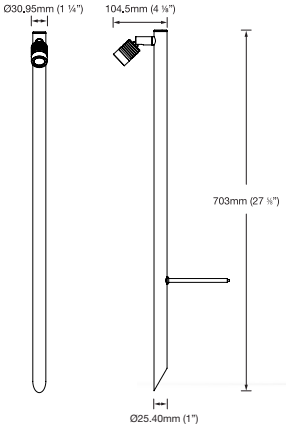

GENERAL SPECIFICATIONS

LED	4 W
LUMENS	360 Lm
EFFICACY	90 Lm / W
COLOUR TEMPERATURE	2700K | 3000K | 4000K
MATERIAL	Natural Copper 316 Stainless Steel Powder Coated Aluminium
FINISH	Solid Copper, Stainless Steel, Black, Bronze, Olive Green, White, White Birch, Dark Grey, Silver Star, Corten, Fine Silver
BEAM	26°, 36°, 74°
CRI	90+
IP	67
WARRANTY	10 Years: Stainless Steel & Copper 5 Years: Aluminium & Electronics
ORIGIN	New Zealand

POWER SPECIFICATIONS

DRIVER SERIES WIRING	**Constant Current Input (Remote)** Requires constant current driver (not supplied). Fixture Input: 6Vf @ 700mA
DRIVER PARALLEL WIRING	**12VAC (Integral)** Requires 12VAC transformer (Not supplied). Fixture input: 12VAC, 4W (700mA) **12VDC (Integral)** Requires 12VDC power supply (Not supplied). Fixture input: 12VDC, 4W (700mA)

PRODUCT CODES (SERIES WIRING)

SOLID COPPER, 36°	128-M4SPRC363
STAINLESS STEEL, 36°	128-M4SPRS363
POWDER-COAT BLACK, 36°	128-M4SPRAEBK363
POWDER-COAT WHITE, 36°	128-M4SPRAEWH363
POWDER-COAT WHITE BIRCH, 36°	128-M4SPRAEWB363
ADDITIONAL CODES AVAILABLE UPON REQUEST	

SERIES WIRING

INPUT 240VAC **OUTPUT** DC Constant Current

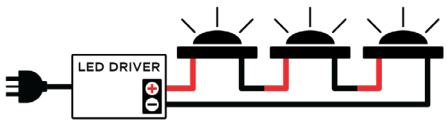

PARALLEL WIRING

INPUT 240VAC **OUTPUT** 12VAC | 24VDC

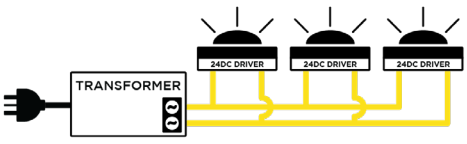

PERTH
+61 08 9240 1008
sales@radiantlighting.com.au

SYDNEY
1300 438 609
sales@radiantlighting.com.au

MELBOURNE
1300 438 609
sales@radiantlighting.com.au

BRISBANE
1300 438 609
sales@radiantlighting.com.au