

GLOW 250 FRAME

By **LOMBARDO**


WALL LIGHT

Also suitable for outdoor use. Integrated 220-240V driver and latest-generation LED modules. Polycarbonate base, produced in-house via injection molding. PMMA diffuser reinforced with impact-resistant elastomers and UV-resistant, chosen for its high transparency, long-term stability, and excellent resistance to yellowing even in outdoor applications. IP66 rating.

PROJECT

TYPE

NOTES

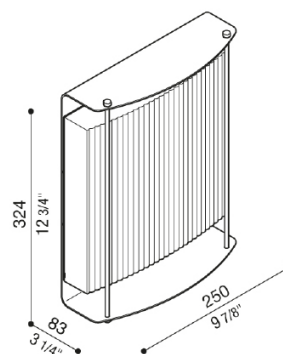

GENERAL SPECIFICATIONS

LED	20 W
LUMENS	1550 Lm
EFFICACY	77 Lm / W
COLOUR TEMPERATURE	2700K / 3000K / 4000K
MATERIAL	Polycarbonate
FINISH	Dark Grey, Light Grey, Bronze
IP	66
BEAM	PMMA Diffused
CRI	80
WARRANTY	Available Upon Request
LIFETIME	50,000hrs L80B20
ORIGIN	Italy

POWER SPECIFICATIONS

DRIVER	Integrated
VOLTAGE	220-240V
DIMMABLE	Phase-Cut

PRODUCT CODES

DARK GREY, 3000K	48-LL167210D3
LIGHT GREY, 3000K	48-LL167210L3
BRONZE, 3000K	48-LL167210M3

2700K & 4000K CODES AVAILABLE UPON REQUEST