

CORE 95 TRACK

Minimal, functional and versatile; the Core Track provides an ideal lighting solution for accent lighting in both residential and commercial applications. Available in two different sizes, there is an option to suit any style of project.



FEATURES

- + High CRI – Defined architectural details and finishes.
- + Adjustable 90°, and Rotatable 350° via unique off-set hinge design.
- + Available in four beam angles, for the perfect light application.
- + High quality reflector, for superior light emissions.
- + Multiple baffle options for further aesthetic freedom and flare reduction.
- + Concealed sleek canopy which ensures effective heat dissipation.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)



GENERAL SPECIFICATIONS

LED	20W	
Lumens	(3000K)	1850 lm
	(4000K)	1920 lm
Efficacy	Up to 96 lm/W	
Colour Temperature	 3000K, Warm White	 4000K, Cool White
Material	Powder Coated Aluminium	
Finish	White Black	
Beam	60° 36° 24° 15°	
CRI	92+	
IP	20	
Colour Deviation	SDCM ≤2	
UGR	<17	
Lifetime	>55,000hrs L80 B10	
Warranty	5 Years	

Please Note: Honeycomb Baffles also come with a honeycomb lens.
Remote DALI dimming available upon request.


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS

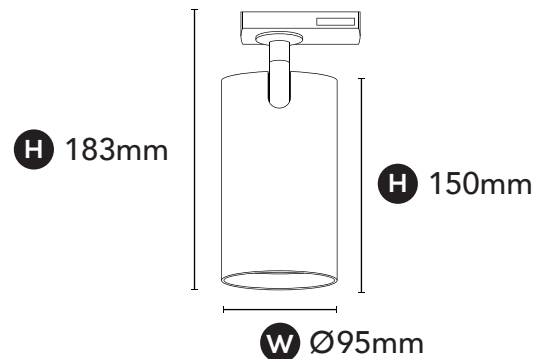

DRIVER SPECIFICATIONS

Power	500mA 240V Built-In Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95

DALI Dimming Available Upon Request

PRODUCT CODES



White, 3000K	118-COTM20W603
Black, 3000K	118-COTM20B603
White, 4000K	118-COTM20W604
Black, 4000K	118-COTM20B604

ACCESSORY CODES

36° Reflector	118-RFLC9536
24° Reflector	118-RFLC9524
15° Reflector	118-RFLC9515
Black Baffle	118-COR95BB
White Baffle	118-COR95BW
Gold Baffle	118-COR95BG
Black Honeycomb Baffle	118-COR95HB
White Honeycomb Baffle	118-COR95HW
Gold Honeycomb Baffle	118-COR95HG

ACCESSORIES

3 Circuit Track Piece



Description

3 circuit track, available in 1m or 2m lengths.



Finishes

- 1m, White
- 1m, Black
- 2m, White
- 2m, Black

Product Code

83-3C1MW
83-3C1MB
83-3C2MW
83-3C2MB

3 Circuit Recessed Track Piece



Description

3 circuit recessed track, available in 1m or 2m lengths.


Finishes

- 1m, White
- 1m, Black
- 2m, White
- 2m, Black

Product Code

83-3CR1MW
83-3CR1MB
83-3CR2MW
83-3CR2MB

Feed Piece



Description

The feed piece connects at the start of the track and supplies power to the entire track configuration.


Finishes

- White
- Black

Product Code

83-3CFPW
83-3CFPB

Dead End



Description

The dead end connects at the end of the track and completes the track with a clean finish.


Finishes

- White
- Black

Product Code

83-3CDEW
83-3CDEB

Straight Connector



Description

The straight connector joins two separate pieces of track together.


Finishes

- White
- Black

Product Code

83-3CSCW
83-3CSCB

Straight Connector Feed



Description

The straight connector feed connects in the middle of two track pieces and supplies power to the entire track configuration. You can use a straight connector feed instead of a regular feed piece.

Finishes


- White
- Black

Product Code

83-3CSFW
83-3CSFB

ACCESSORIES

Corner Connector



Description

The corner connector is used to connect two pieces of track in a corner configuration. These pieces are available in both right and left configurations. A corner connector can also provide power to the track.



Finishes

- Left, White
- Left, Black
- Right, White
- Right, Black

Product Code

83-3CLCW
83-3CLCB
83-3CRCW
83-3CRCB

T Connector



Description

The T Connector is used to connect three pieces of track in a T configuration. The T Connector can also supply power to the track. Available in left and right configurations.



Finishes

- White
- Black
- White
- Black

Product Code

83-3CTLCW
83-3CTLCB
83-3CTRCW
83-3CTRCB

Cross Connector



Description

The cross connector is used to connect four pieces of track in a cross configuration. The cross connector also supplies power to the track.


Finishes

- White
- Black

Product Code

83-3CCCW
83-3CCCB

Adaptor



Description

The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the luminaire to the track.

Finishes

- White
- Black

Product Code

N/A
Pre-assembled on fitting.

The adaptor can carry fittings of 5kg or less.

Wire Suspension Kit



Description

The wire suspension kit is used to suspend the track configuration.


Finishes

- White
- Black

Product Code

83-3CWSUPW
83-3CWSUPB

Universal Fixing Piece



Description

The universal fixing piece can be used to mount the track in a fixed position.

Finishes

- White
- Black

Product Code

83-3CUFW
83-3CUBB