

CORE 70 TRACK

Minimal, functional and versatile; the Core Track provides an ideal lighting solution for accent lighting in both residential and commercial applications.



FEATURES

- + High CRI – Defined architectural details and finishes.
- + Adjustable 90°, and Rotatable 350° via unique off-set hinge design.
- + Available in four beam angles, for the perfect light application.
- + High quality reflector, for superior light emissions.
- + Multiple baffle options for further aesthetic freedom and flare reduction.
- + Concealed sleek canopy which ensures effective heat dissipation.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)



GENERAL SPECIFICATIONS

LED	15W	
Lumens	(3000K)	1300 lm
	(4000K)	1420 lm
Efficacy	Up to 94 lm/W	
Colour Temperature	 3000K, Warm White	 4000K, Cool White
Material	Powder Coated Aluminium	
Finish	White Black	
Beam	60° 36° 24° 15°	
CRI	92+	
IP	20	
Colour Deviation	SDCM ≤2	
UGR	<16	
Lifetime	>55,000hrs L80 B10	
Warranty	5 Years	

Please Note: Honeycomb Baffles also come with a honeycomb lens.
Remote DALI dimming available upon request.


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS

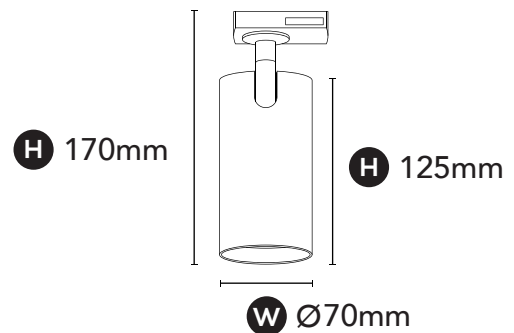

DRIVER SPECIFICATIONS

Power	350mA 240V Built-In Dimmable Driver
Dimming	Phase-Cut Dimming
Power Factor	> 0.95

DALI Dimming Available Upon Request

PRODUCT CODES



White, 3000K	118-COTS15W603
Black, 3000K	118-COTS15B603
White, 4000K	118-COTS15W604
Black, 4000K	118-COTS15B604

ACCESSORY CODES

36° Reflector	118-RFLC7036
24° Reflector	118-RFLC7024
15° Reflector	118-RFLC7015
Black Baffle	118-COR70BB
White Baffle	118-COR70BW
Gold Baffle	118-COR70BG
Black Honeycomb Baffle	118-COR70HB
White Honeycomb Baffle	118-COR70HW
Gold Honeycomb Baffle	118-COR70HG

ACCESSORIES

3 Circuit Track Piece



Description

3 circuit track, available in 1m or 2m lengths.



Finishes

- 1m, White
- 1m, Black
- 2m, White
- 2m, Black

Product Code

83-3C1MW
83-3C1MB
83-3C2MW
83-3C2MB

3 Circuit Recessed Track Piece



Description

3 circuit recessed track, available in 1m or 2m lengths.


Finishes

- 1m, White
- 1m, Black
- 2m, White
- 2m, Black

Product Code

83-3CR1MW
83-3CR1MB
83-3CR2MW
83-3CR2MB

Feed Piece



Description

The feed piece connects at the start of the track and supplies power to the entire track configuration.


Finishes

- White
- Black

Product Code

83-3CFPW
83-3CFPB

Dead End



Description

The dead end connects at the end of the track and completes the track with a clean finish.


Finishes

- White
- Black

Product Code

83-3CDEW
83-3CDEB

Straight Connector



Description

The straight connector joins two separate pieces of track together.


Finishes

- White
- Black

Product Code

83-3CSCW
83-3CSCB

Straight Connector Feed



Description

The straight connector feed connects in the middle of two track pieces and supplies power to the entire track configuration. You can use a straight connector feed instead of a regular feed piece.

Finishes


- White
- Black

Product Code

83-3CSFW
83-3CSFB

ACCESSORIES

Corner Connector



Description

The corner connector is used to connect two pieces of track in a corner configuration. These pieces are available in both right and left configurations. A corner connector can also provide power to the track.



Finishes

- Left, White
- Left, Black
- Right, White
- Right, Black

Product Code

83-3CLCW
83-3CLCB
83-3CRCW
83-3CRCB

T Connector



Description

The T Connector is used to connect three pieces of track in a T configuration. The T Connector can also supply power to the track. Available in left and right configurations.



Finishes

- White
- Black
- White
- Black

Product Code

83-3CTLCW
83-3CTLCB
83-3CTRCW
83-3CTRCB

Cross Connector



Description

The cross connector is used to connect four pieces of track in a cross configuration. The cross connector also supplies power to the track.


Finishes

- White
- Black

Product Code

83-3CCCW
83-3CCCB

Adaptor



Description

The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the luminaire to the track.

Finishes

- White
- Black

Product Code

N/A
Pre-assembled on fitting.

The adaptor can carry fittings of 5kg or less.

Wire Suspension Kit

Description

The wire suspension kit is used to suspend the track configuration.


Finishes

- White
- Black

Product Code

83-3CWSUPW
83-3CWSUPB

Universal Fixing Piece



Description

The universal fixing piece can be used to mount the track in a fixed position.

Finishes

- White
- Black

Product Code

83-3CUFW
83-3CUFB