CORE MINI TRACK **G**

Minimal, functional and versatile; the Core Mini Track provides an ideal lighting solution for accent lighting in both residential and commercial applications.



FEATURES

- + High CRI Defined architectural details and finishes.
- + Adjustable 90°, and Rotatable 350° via unique off-set hinge design.
- + Available in four beam angles, for the perfect light application.
- + High quality reflector, for superior light emissions.
- + Multiple baffle options for further aesthetic freedom and flare reduction.
- + Concealed sleek canopy which ensures effective heat dissipation.



GENERAL SPECIFICATIONS					
LED		11W			
Lumens	(3000K) (4000K)	1140 lm 1200 lm			
Efficacy		Up to 109 Lm/W			
Colour Temperature		3000K, Warm White 4000K, Cool White			
Material		Powder Coated Aluminium			
Finish		White Black			
Beam (Reflector & Lens)		60° 36° 24° 15°			
CRI		95+			
IP		20			
Colour Deviation		SDCM ≤2			
UGR		<16			
Lifetime		>55,000hrs L80 B10			
Warranty		5 Years			


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS




DRIVER SPECIFICATIONS					
Power	350mA 240V Built-In Dimmable Driver				
Dimming	Phase-Cut Dimming				
Power Factor	> 0.95				
DALI Dimming Available Upon Request					
PRODUCT	CODES				
White, 3000K	118-COTM311W603				
Black, 3000K	118-COTM311B603				
White, 4000K	118-COTM311W604				
Black, 4000K	118-COTM311B604				
ACCESSORY CODES					
36° Reflector	118-RFLE336				
24° Reflector	118-RFLE324				
15° Reflector	118-RFLE315				
36° Lens	118-LSE336				
24° Lens	118-LSE324				
15° Lens	118-LSE315				





1300 438 609 radiantlighting.com.au

ACCESSORIES

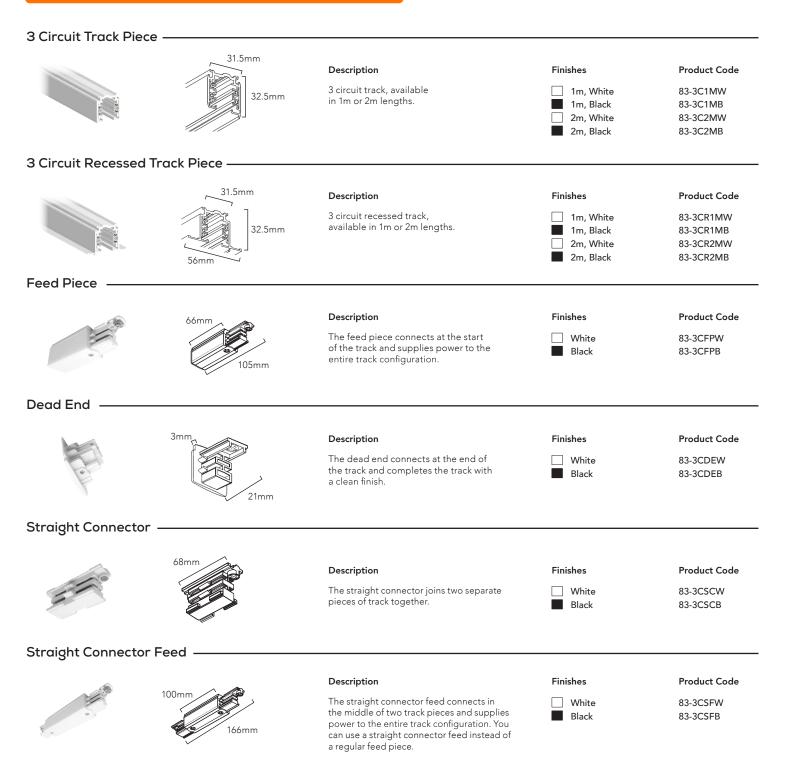



ACCESSORIES

Corner Connector

		Description	Finishes	Product Code
- 12	66mm 99mm	The corner connector is used to connect two pieces of track in a corner configuration. These pieces are available in both right and left configurations. A corner connector can also provide power to the track.	 Left, White Left, Black Right, White Right, Black 	83-3CLCW 83-3CLCB 83-3CRCW 83-3CRCB
T Connector ——				
	67mm 299mm	Description	Finishes	Product Code
	166mm 100mm	The T Connector is used to connect three pieces of track in a T configuration. The T Connector can also supply power to the track. Available in left and right configurations.	WhiteBlackWhiteBlack	83-3CTLCW 83-3CTLCB 83-3CTRCW 83-3CTRCB
Cross Connector				
		Description	Finishes	Product Code
	166mm 100mm 34mm	The cross connector is used to connect four pieces of track in a cross configuration. The cross connector also supplies power to the track.	White■ Black	83-3CCCW 83-3CCCB
Adaptor				
	70mm	Description	Finishes	Product Code
	70mm 40mm 114mm 32mm	Description The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the luminaire to the track.	Finishes	Product Code N/A Pre-assembled on fitting.
	40mm	The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the	White	N/A Pre-assembled
Wire Suspension K	40mm 114mm 32mm	The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the luminaire to the track.	White	N/A Pre-assembled
Wire Suspension K	40mm 114mm 32mm	The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the luminaire to the track.	White	N/A Pre-assembled
Wire Suspension K	40mm 114mm 32mm	The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the luminaire to the track. The adaptor can carry fittings of 5kg or less.	☐ White ■ Black	N/A Pre-assembled on fitting.
Wire Suspension K	and the second s	The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the luminaire to the track. The adaptor can carry fittings of 5kg or less. Description The wire suspension kit is used to suspend	 White ■ Black Finishes □ White 	N/A Pre-assembled on fitting. Product Code 83-3CWSUPW
	and the second s	The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the luminaire to the track. The adaptor can carry fittings of 5kg or less. Description The wire suspension kit is used to suspend the track configuration.	 White Black Finishes White Black 	N/A Pre-assembled on fitting. Product Code 83-3CWSUPW 83-3CWSUPB
	and the second s	The adaptor is a clip-in component which comes as standard on every Faze track fitting. The adaptor is used to connect the luminaire to the track. The adaptor can carry fittings of 5kg or less. Description The wire suspension kit is used to suspend	 White ■ Black Finishes □ White 	N/A Pre-assembled on fitting. Product Code 83-3CWSUPW



