





3 Circuit Track

Three Circuit Track utilises 3 live copper conductors to allow 3 lighting circuits to be individually dimmed or switched on and/or off. When a track light is added, it can be assigned to one of the three circuits via a dial.

SPECIFICATIONS & MEASUREMENTS




Available in 2 colours


- BLACK
- WHITE

LENGTHS


1000mm



2000mm



MOUNTING GUIDE

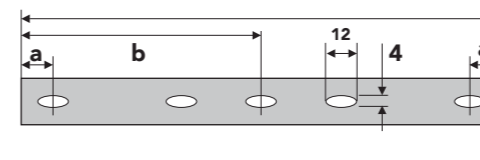

L = TRACK LENGTH

L (mm)	a (mm)	b (mm)
1000	250	
2000	250	1000

LOAD BEARING GUIDE


Suspended Track	If you place a wire suspension every metre as recommended, you can attach 25kg to a metre of conductor rail and single weights up to 5kg . If you only install a wire suspension every 2 metres, you may only attach 10kg and single weights of only up to 1kg.
Mounted Track	When using mounted track you can attach up to 20kg . However this will also depend on the ceiling type and the number of screws fastening the track to the ceiling.

CONFIGURATION GUIDE

CONFIGURATION TYPE


CONFIGURATION VARIATIONS (V)

■ POWER SOURCE

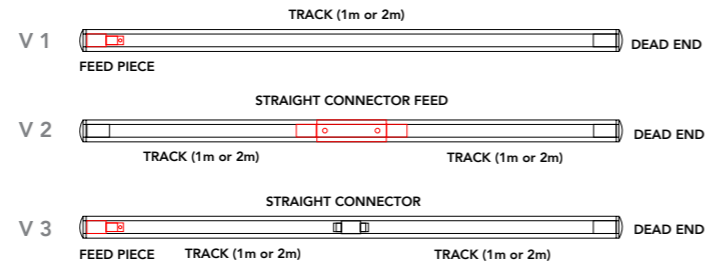


STRAIGHT CONFIGURATION

FEED PIECE
STRAIGHT CONNECTOR FEED
DEAD END
TRACK (1m or 2m)
STRAIGHT CONNECTOR

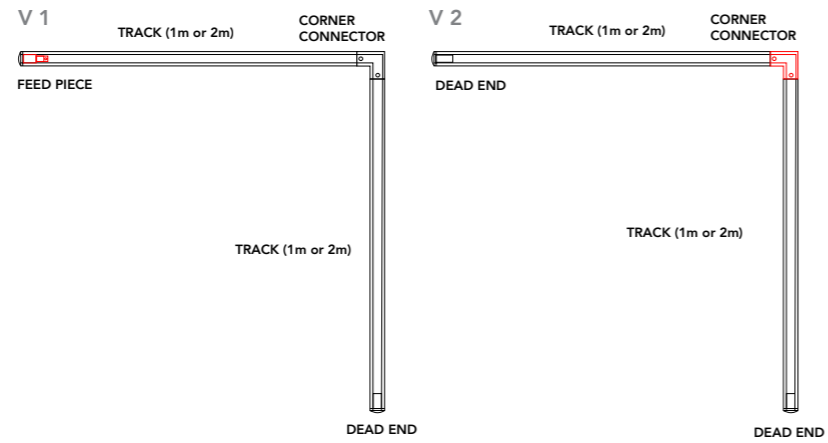


L CONFIGURATION

FEED PIECE
CORNER CONNECTOR
DEAD END
TRACK (1m or 2m)

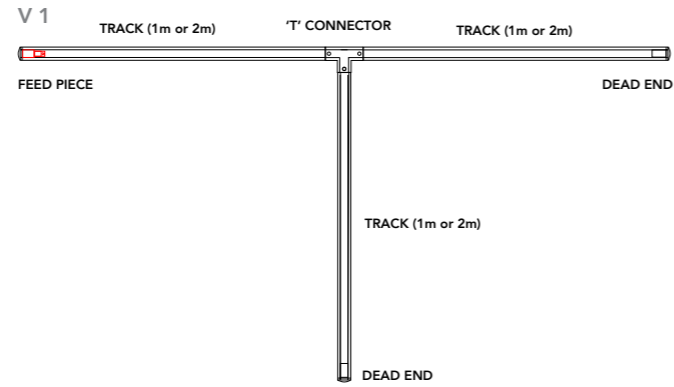

T CONFIGURATION


FEED PIECE
T' CONNECTOR
DEAD END
TRACK (1m or 2m)

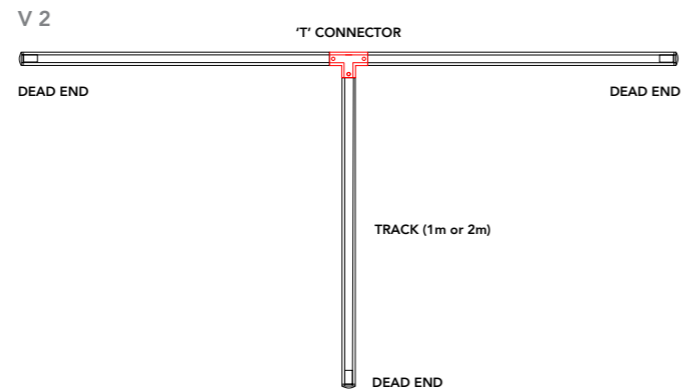

CONFIGURATION TYPE

H CONFIGURATION

FEED PIECE
T' CONNECTOR
DEAD END
TRACK (1m or 2m)

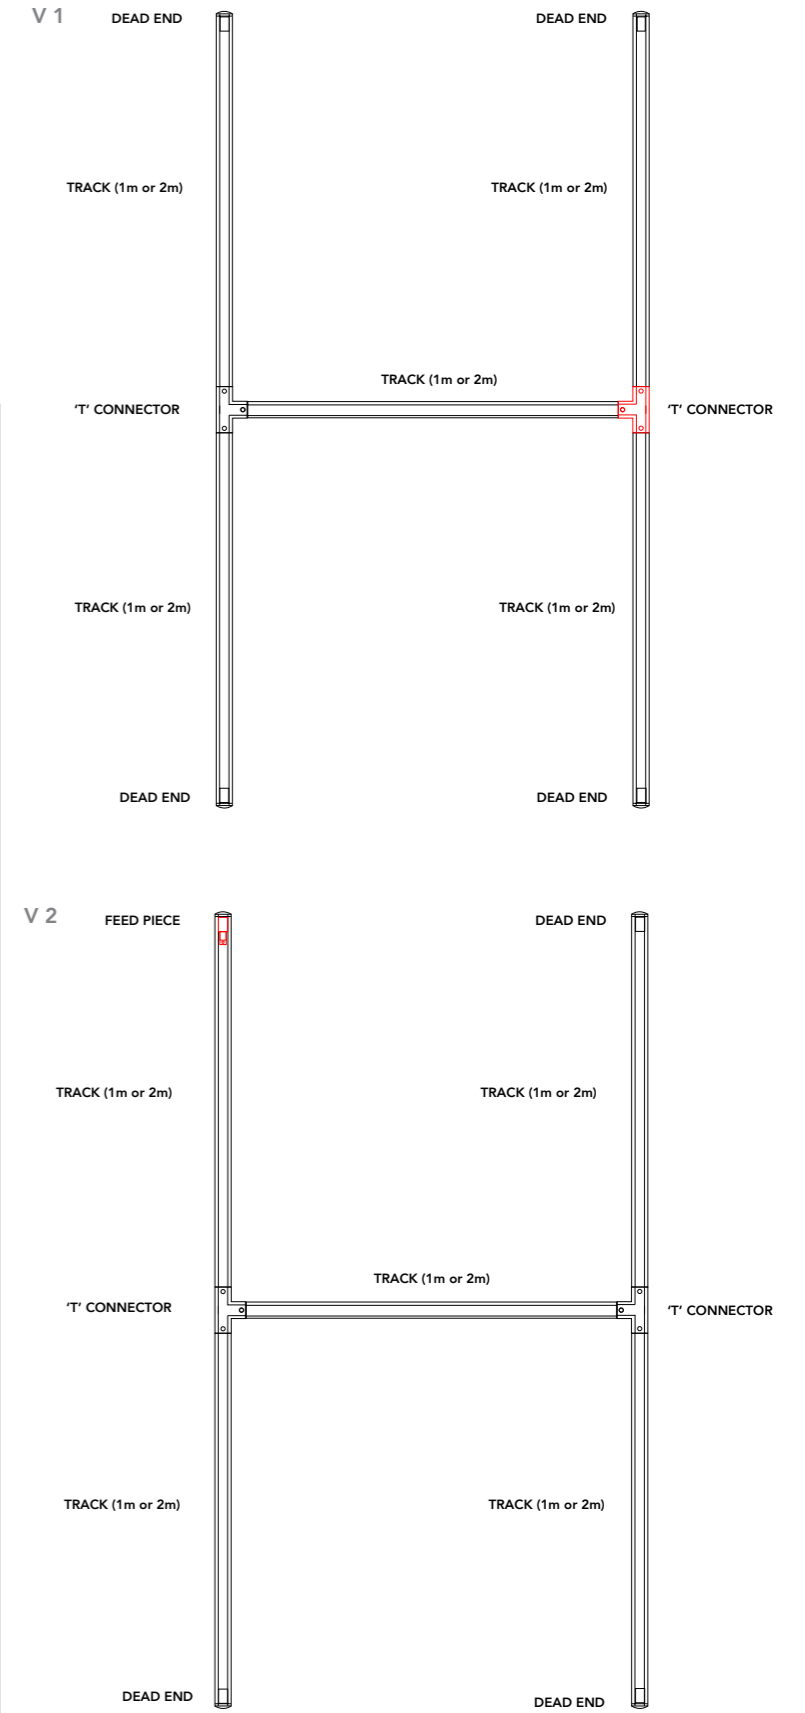

COMPONENTS GUIDE

	FEED PIECE	
	83-3CFPW	<input type="checkbox"/>
	83-3CFPB	<input checked="" type="checkbox"/>
	DEAD END	
	83-3CDEW	<input type="checkbox"/>
	83-3CDEB	<input checked="" type="checkbox"/>
	STRAIGHT CONNECTOR	
	83-3CSCW	<input type="checkbox"/>
	83-3CSCB	<input checked="" type="checkbox"/>
	STRAIGHT CONNECTOR FEED	
	83-3CSFW	<input type="checkbox"/>
	83-3CSFB	<input checked="" type="checkbox"/>
	CORNER CONNECTOR	
	83-3CLCW (L) 83-3CRCW (R)	<input type="checkbox"/>
	83-3CLCB (L) 83-3CRCB (R)	<input checked="" type="checkbox"/>
	T CONNECTOR	
	83-3CTCW	<input type="checkbox"/>
	83-3CTCB	<input checked="" type="checkbox"/>
	CROSS CONNECTOR	
	83-3CCCW	<input type="checkbox"/>
	83-3CCCB	<input checked="" type="checkbox"/>
	WIRE SUSPENSION	
	83-3CWSUP	
	ADAPTOR	



Air Track


Minimal, functional and versatile. The AIR TRACK provides an ideal solution for accent lighting in both residential and commercial spaces.



Air Track

Versatile design

Minimal, functional and versatile. The AIR TRACK, provides an ideal solution for accent lighting in both residential and commercial spaces.




Honeycomb lens

- Multiple
baffle
options**
- White
 - Black
 - Gold



Enhancing accessories


The accessories for the AIR TRACK allow you to completely customise the design to suit your interior space, with multiple baffle ring colours to choose from or a honeycomb lens to soften the light. The AIR TRACK can adapt to your needs.

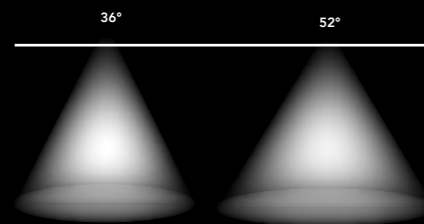

Available in two beam angles
Providing the perfect light for any application.

- White
- Black

Available in two finishes
Providing options to suit any space.



High quality aluminium housing
Providing strength and durability.

