




3 Circut Track


Three Circuit Track utilises 3 live copper conductors to allow 3 lighting circuits to be individually dimmed or switched on and/or off. When a track light is added, it can be assigned to one of the three circuits via a dial.

SPECIFICATIONS & MEASUREMENTS

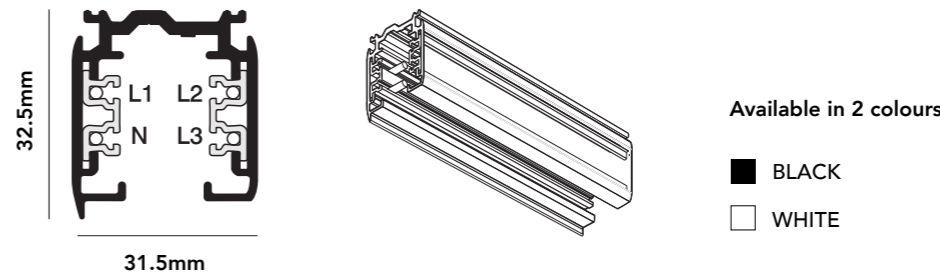


LENGTHS


1000mm



2000mm



MOUNTING GUIDE

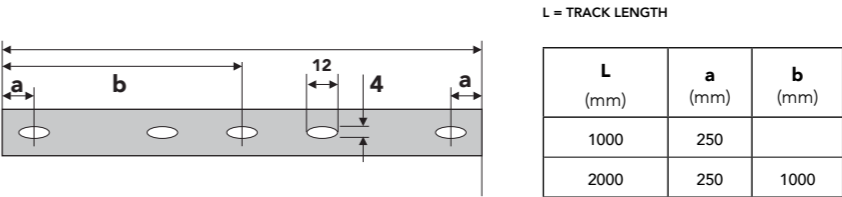

LOAD BEARING GUIDE

Suspended Track	If you place a wire suspension every metre as recommended, you can attach 25kg to a metre of conductor rail and single weights up to 5kg . If you only install a wire suspension every 2 metres, you may only attach 10kg and single weights of only up to 1kg.
Mounted Track	When using mounted track you can attach up to 20kg . However this will also depend on the ceiling type and the number of screws fastening the track to the ceiling.

CONFIGURATION GUIDE

CONFIGURATION TYPE

STRAIGHT CONFIGURATION

- FEED PIECE
- STRAIGHT CONNECTOR FEED
- DEAD END
- TRACK (1m or 2m)
- STRAIGHT CONNECTOR


L CONFIGURATION

- FEED PIECE
- CORNER CONNECTOR
- DEAD END
- TRACK (1m or 2m)

T CONFIGURATION

- FEED PIECE
- 'T' CONNECTOR
- DEAD END
- TRACK (1m or 2m)

CONFIGURATION VARIATIONS (V)

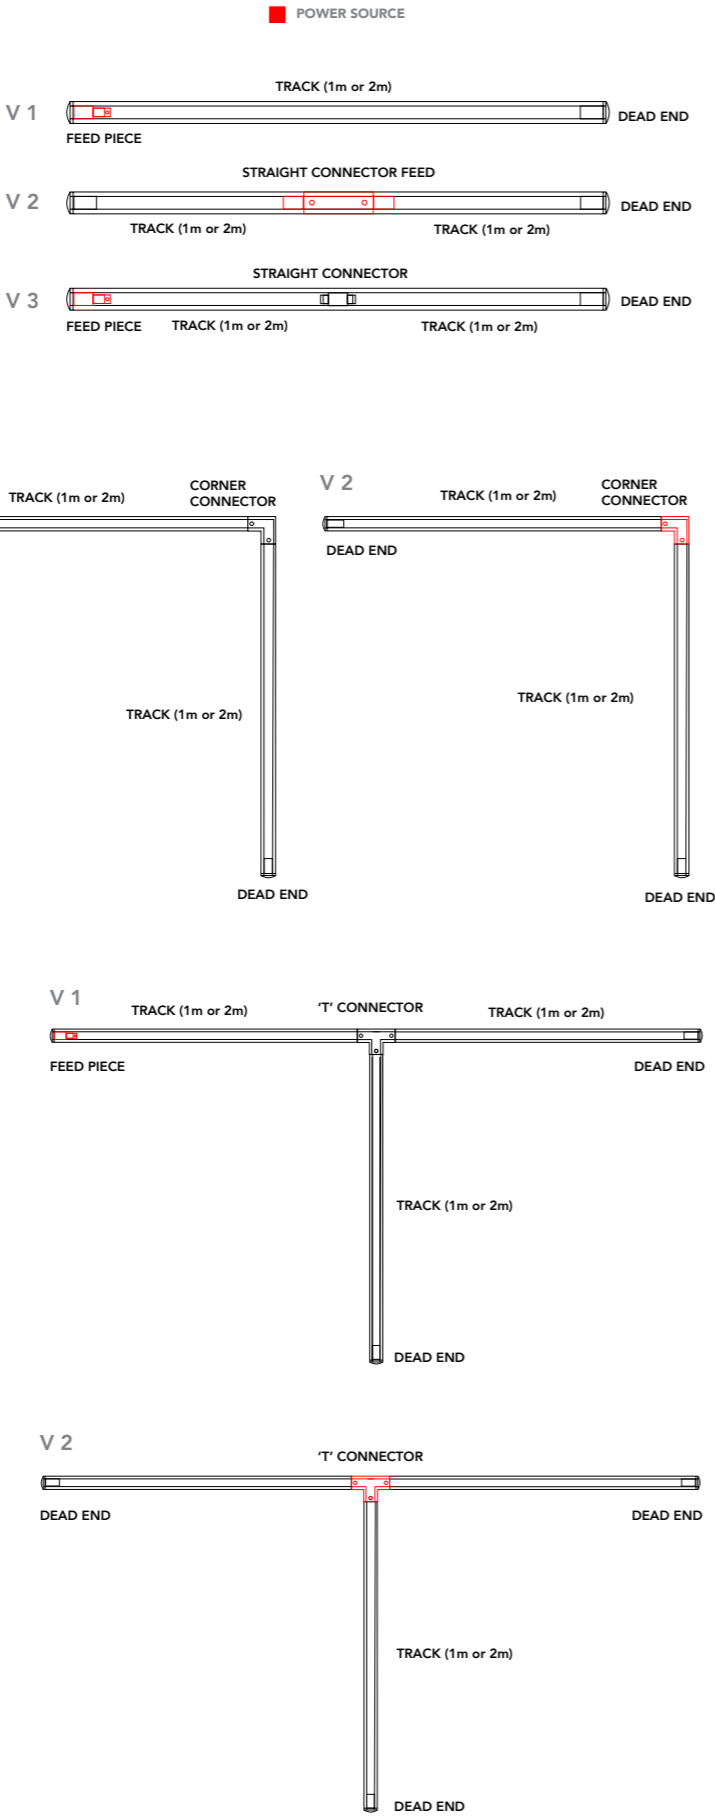


CONFIGURATION TYPE

H CONFIGURATION

- FEED PIECE
- 'T' CONNECTOR
- DEAD END
- TRACK (1m or 2m)

COMPONENTS GUIDE

	FEED PIECE 83-3CFPW <input type="checkbox"/> 83-3CFPB <input checked="" type="checkbox"/>
	DEAD END 83-3CDEW <input type="checkbox"/> 83-3CDEB <input checked="" type="checkbox"/>
	STRAIGHT CONNECTOR 83-3CSCW <input type="checkbox"/> 83-3CSCB <input checked="" type="checkbox"/>
	STRAIGHT CONNECTOR FEED 83-3CSFW <input type="checkbox"/> 83-3CSFB <input checked="" type="checkbox"/>
	CORNER CONNECTOR 83-3CLCW (L) 83-3CRCW (R) <input type="checkbox"/> 83-3CLCB (L) 83-3CRCB (R) <input checked="" type="checkbox"/>
	T CONNECTOR 83-3CTCW <input type="checkbox"/> 83-3CTCB <input checked="" type="checkbox"/>
	CROSS CONNECTOR 83-3CCCW <input type="checkbox"/> 83-3CCCB <input checked="" type="checkbox"/>
	WIRE SUSPENSION 83-3CWSUP
	ADAPTOR

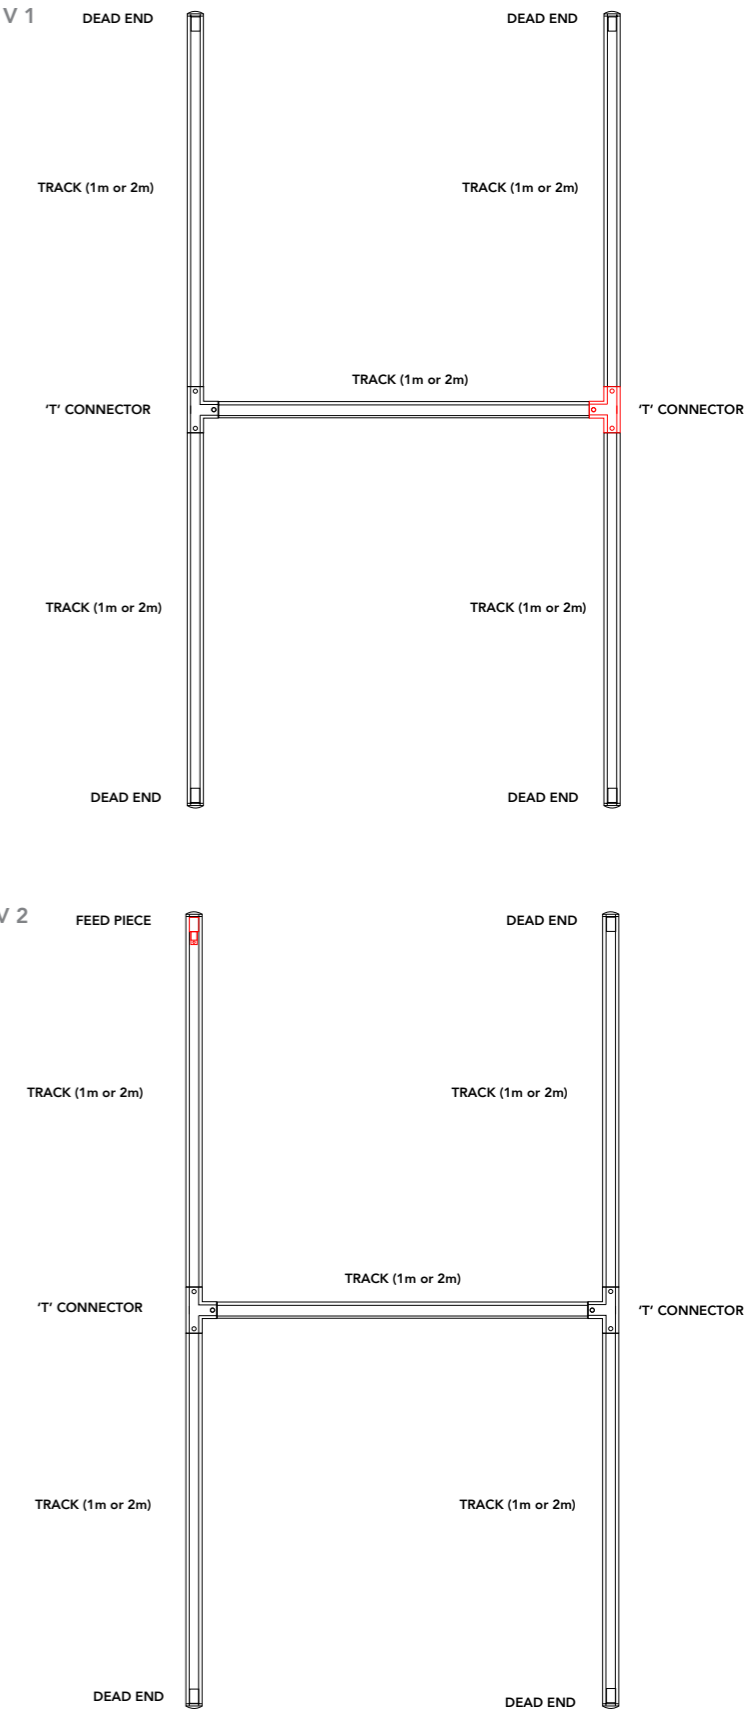




Vita Track

The VITA TRACK brings the VITA series to a new level providing a new variety of lighting to our track collection.



Vita Track


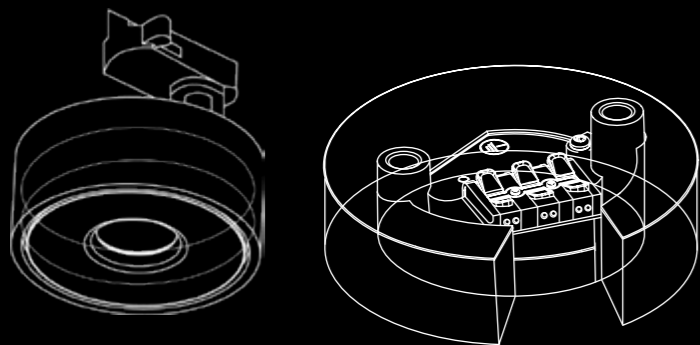


Specially designed circular driver

The VITA TRACK showcases a unique circular driver, specially designed with a power factor of 0.95. Being fully dimmable, this is one of the most efficient drivers available.

Interchangeable snap-lock fascia

Featuring a magnetic 'snap-lock' front ring fascia available in three different colours, the VITA series allows customisation to suit any interior space.

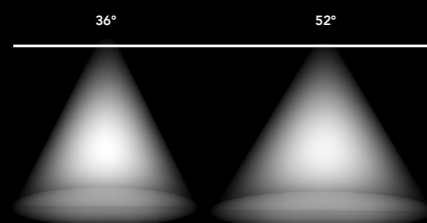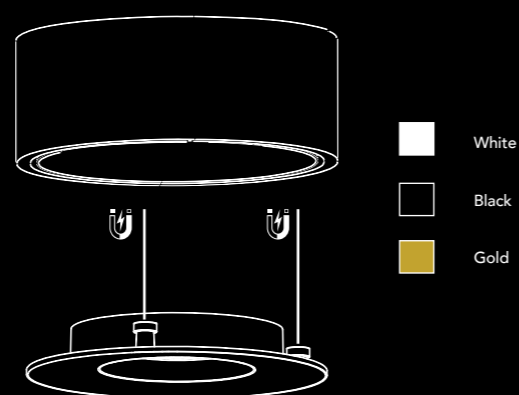


Available in two beam angles

Providing the perfect light for any application.



Available in two finishes

Providing options to suit any space.

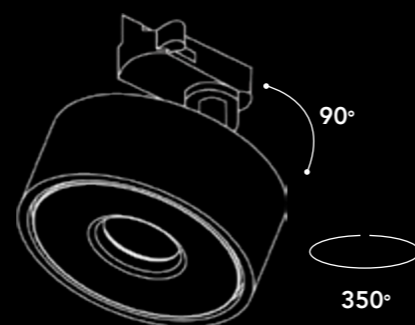

Revolutionary hinge design

The Vita features a revolutionary hinge design, allowing a 90° tilt, all in one swift smooth motion.



Vita Track

FURTHER TECHNICAL INFORMATION