




## PRO SQUARE MINI



The new generation Faze PRO MINI downlight is specifically designed to enhance. Utilizing superior LED technology and with the highest CRI, these recessed ceiling lights are guaranteed to bring your spaces to life.

### FEATURES

- + Precision reflector with clear lens - for better light distribution and performance
- + Specially designed heat sink - for class leading heat dissipation.
- + IC-4 rated
- + Black baffle design - eliminates glare for optimum visual comfort.
- + IP44 and suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 11W (71-CAS300)

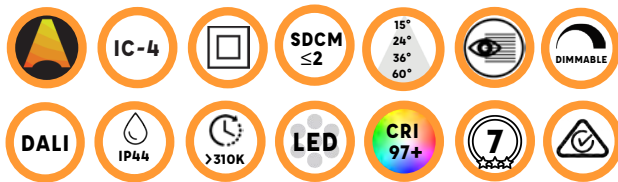

### GENERAL SPECIFICATIONS

LED	11W *operating wattage 12W
Lumens	850 lm (3000K)   910 lm (4000K)
Colour	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Efficacy	77 lm/w (3000K)   82 lm/w (4000K)
Beam	15°   24°   36°   60°
Material	Powder Coated Aluminium
CRI	97+
Finish	White   Black
IP	44
Colour Deviation	SDCM ≤2
Lifetime	L70 >310,000hrs
Warranty	7 Years

**Please Note:** When using C-Bus, use universal or trailing edge dimming modules




### PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

### DIMENSIONS (mm)

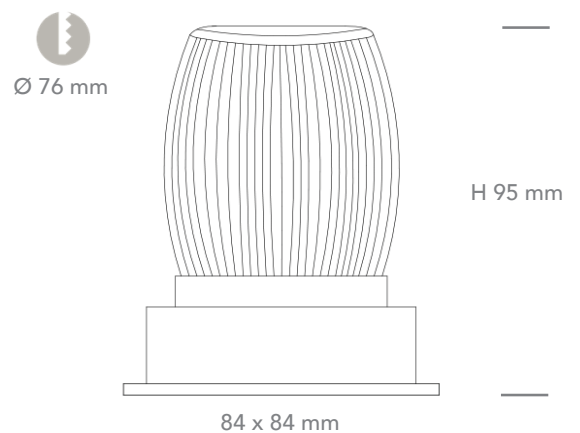

### DRIVER SPECIFICATIONS

L 98 x W 38 x H 24 mm

Power	240V Remote Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

***DALI dimming available upon request***

### PRODUCT CODES

White, 3000K, 60°	<b>118-PR7MS11W603</b>
White, 4000K, 60°	<b>118-PR7MS11W604</b>
Black, 3000K, 60°	<b>118-PR7MS11B603</b>
Black, 4000K, 60°	<b>118-PR7MS11B604</b>

### REFLECTOR CODES

15° Reflector	<b>118-RFLP15</b>
24° Reflector	<b>118-RFLP24</b>
36° Reflector	<b>118-RFLP36</b>